



CLEAN OIL  
BRIGHT IDEAS

# A 27/27

## CJC™ Off-line Filter Insert

## CJC™ Product Sheet

### APPLICATION

The CJC™ A 27/27 Filter Insert is ideal for the fine filtration of mineral and synthetic based

- engine lube oils
- hydraulic oils
- gear oils
- honing oils
- quenching oils

### FILTRATION CAPABILITY

#### ● Particle Removal

All CJC™ Filter Inserts have the following filtration degree:

- particles  $> 3 \mu\text{m}$  (micron) absolute  
= 98.7% of all solid particles
- particles  $> 0.8 \mu\text{m}$  (micron) nominal  
= 50% of all solid particles

are retained in each pass.

The dirt holding capacity of an A 27/27 Insert is 4 litres of evenly distributed solids.

#### ● Degradation Products

Oxidation by-products, resin / sludge, and varnish are retained by the cellulose material. The cellulose will retain **appr. 3 kg** of degradation products.

#### ● Water Removal

The water absorption potential is up to 50% (i.e. 2,000 mL H<sub>2</sub>O) of the total contaminant holding capacity.

### DIMENSIONS

The figures below are nominal:

Diameter: 27 cm  
Height: 27 cm

### COMPONENT


CJC™ Filter Inserts type A consist of bonded discs. Main ingredient is wood cellulose.

### IDENTIFICATION

To order the A 27/27 Filter Insert, please use:

#### Article Nos

1 x 27/27: PA5600317  
2 x 27/27: PA5600318

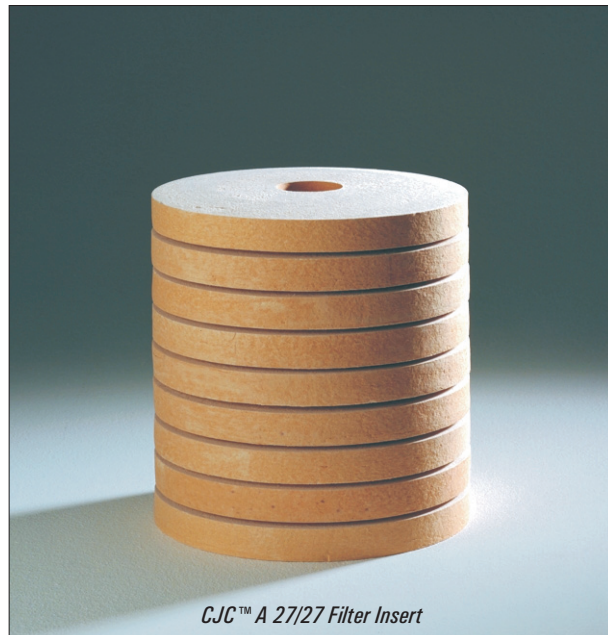

CJC™ A 27/27 Filter Insert